


Mitsubishi Radio Wire Harnesses


Up To 1998-1999

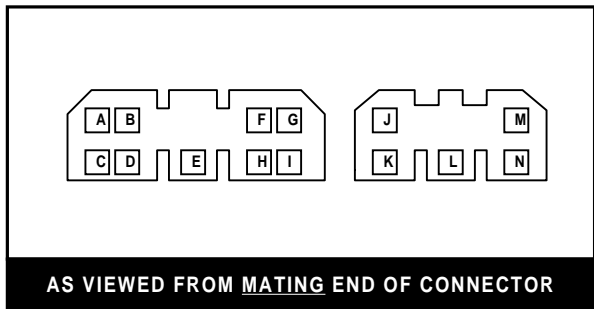

Pin	What It Is	Mitsubishi-Chrysler Corp In Dash Wire Color	Typical New Radio Equivalent Wire Color
A	Right Front Speaker (+)	(2) White w/ Red Stripe	Gray
B	Right Rear Speaker (+)	Yellow w/ Red Stripe	Purple
C		Do Not Use	
D	Left Front Speaker (+)	(2) White w/ Blue Stripe	White
E	Left Rear Speaker (+)	Yellow w/ Blue Stripe	Green
F	Light Dimmer Wire		
G	Headlight Illumination		
H	+12 Volt Battery Wire	Red w/ Black Stripe	Yellow
I	+12 Volt Ignition Wire	Blue	Red
J	Left Rear Speaker (-)	Gray w/ Blue Stripe	Green w/ Black Stripe
K	Right Rear Speaker (-)	Gray w/ Red Stripe	Purple w/ Black Stripe
L	Power Antenna Turn On		Blue
M	Left Front Speaker (-)	(2) Black w/ Blue Stripe	White w/ Black Stripe
N	Right Front Speaker (-)	(2) Black w/ Black Stripe	Gray w/ Black Stripe

NOTE: this vehicle does not have a (-) Ground Wire attached to either connector. The radio grounds when the metal brackets attached to the radio screw into the metal dash or the ground wire from the new radio is screwed into metal of the vehicles dash.

1998-1999 And Newer

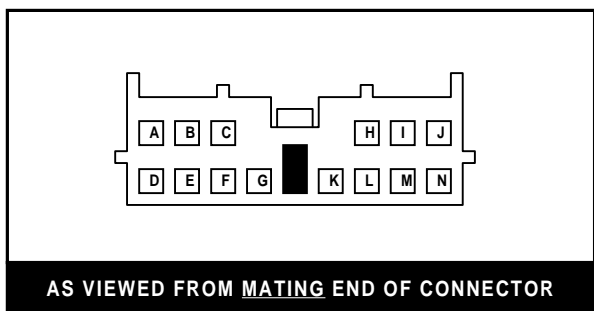

Pin	What It Is	Typical Mitsubishi In Dash Wire Color	Typical New Radio Equivalent Wire Color
A	Right Rear Speaker (+)	Aqua	Purple
B	Left Rear Speaker (+)	Yellow w/ Blue Stripe	Green
C	Power Antenna Turn On		Blue
D	Right Rear Speaker (-)	Yellow w/ Green Stripe	Purple w/ Black Stripe
E	Left Rear Speaker (-)	Yellow w/ Red Stripe	Green w/ Black Stripe
F		Do Not Use	
G	+12 Volt Ignition Wire	Blue	Red
H		Do Not Use	
I	Left Front Speaker (+)	Red w/ White Stripe	White
J	Right Front Speaker (+)	Red	Gray
K	+12 Volt Battery Wire	Red w/ Black Stripe	Yellow
L		Do Not Use	
M	Left Front Speaker (-)	Red w/ Blue Stripe	White w/ Black Stripe
N	Right Front Speaker (-)	Blue	Gray w/ Black Stripe

Note: using an optional snap on wire harness adapter will simplify the wiring. Most snap on wire harness adapters have already converted and color coded the wires from the auto makers in dash wire harness to match typical aftermarket radio wire colors.

** The wire colors listed in the chart above are typical for these vehicles during these years but may not be the exact colors for this vehicle. This is another reason to use a snap on wire harness adapter. **